


衛生下水道工程管材

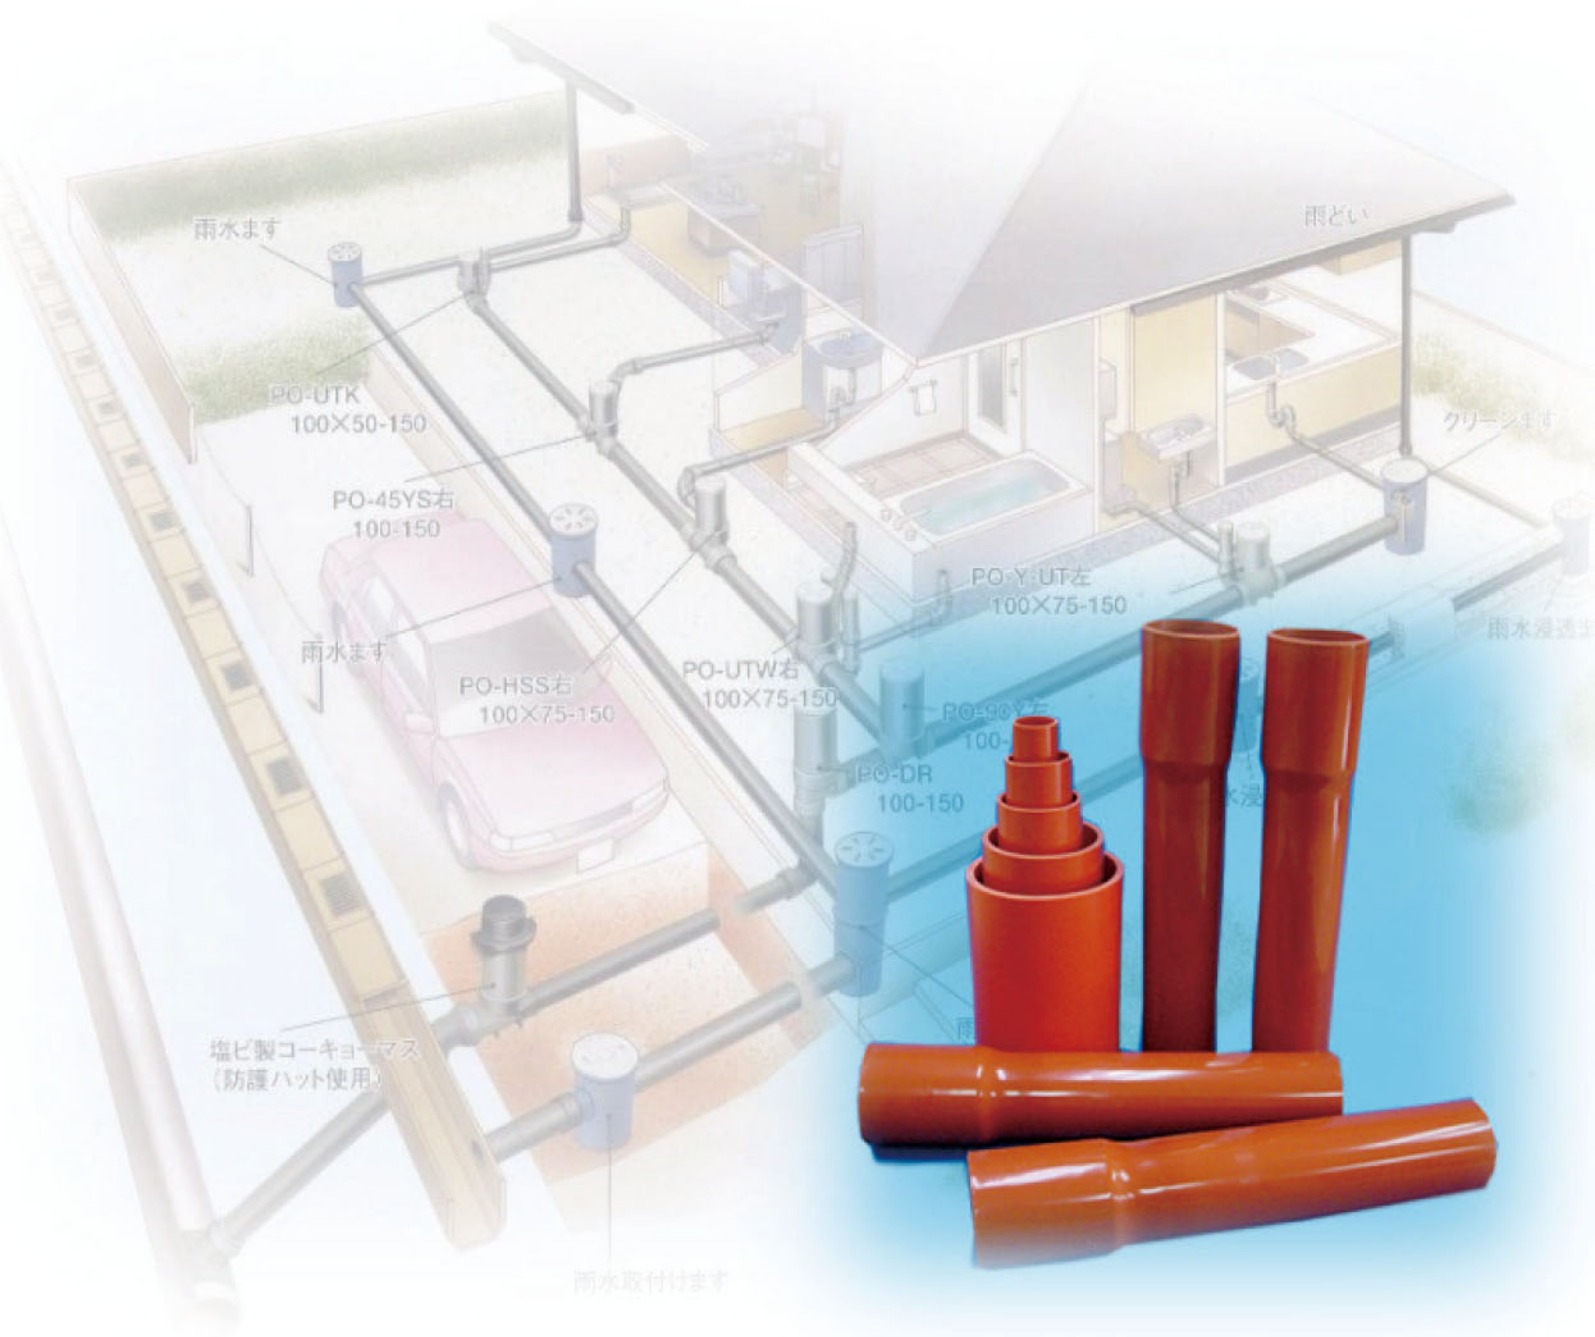

華夏海灣塑膠股份有限公司
CHINA GENERAL PLASTICS CORPORATION

衛生下水道工程管材

◎ 特性

- ▶ 不影響水質
- ▶ 流體阻力小，不易附著水垢
- ▶ 施工簡易
- ▶ 耐酸鹼性，耐腐蝕性優異



◎ 尺寸表：

標稱管徑		外徑及許可差 ⁽¹⁾ (mm)	厚度		大約內徑 (參考值)	質量 (kg/m) (參考值)	20°C 許可操作壓力 (kgf/cm ²)	長度 (m)
			最小 (mm)	許可差 (mm)				
50	2"	60 ± 0.4	4.1	+0.8	51	1.122	7.65	4
65	2 1/2"	76 ± 0.5	4.1	+0.8	67	1.445		4
80	3"	89 ± 0.5	5.5	+0.8	77	2.202		4
100	4"	114 ± 0.6	6.6	+1.0	100	3.409		5
125	5"	140 ± 0.8	7.0	+1.0	125	4.464		5
150	6"	165 ± 1.0	8.9	+1.4	146	6.701		6
200	8"	216 ± 1.3	10.3	+1.4	194	10.129		6
250	10"	267 ± 1.6	12.7	+1.8	240	15.481		6
300	12"	318 ± 1.9	15.1	+2.2	286	21.962		6
350	14"	370 ± 2.2	18.0	+2.6	333	30.407		6
400	16"	420 ± 2.6	20.5	+3.0	378	39.336		6


註：外徑係指任意互相垂直兩外徑之算數平均值。



◎ 工廠登記證



◎ 苗栗縣政府營利事業登記證

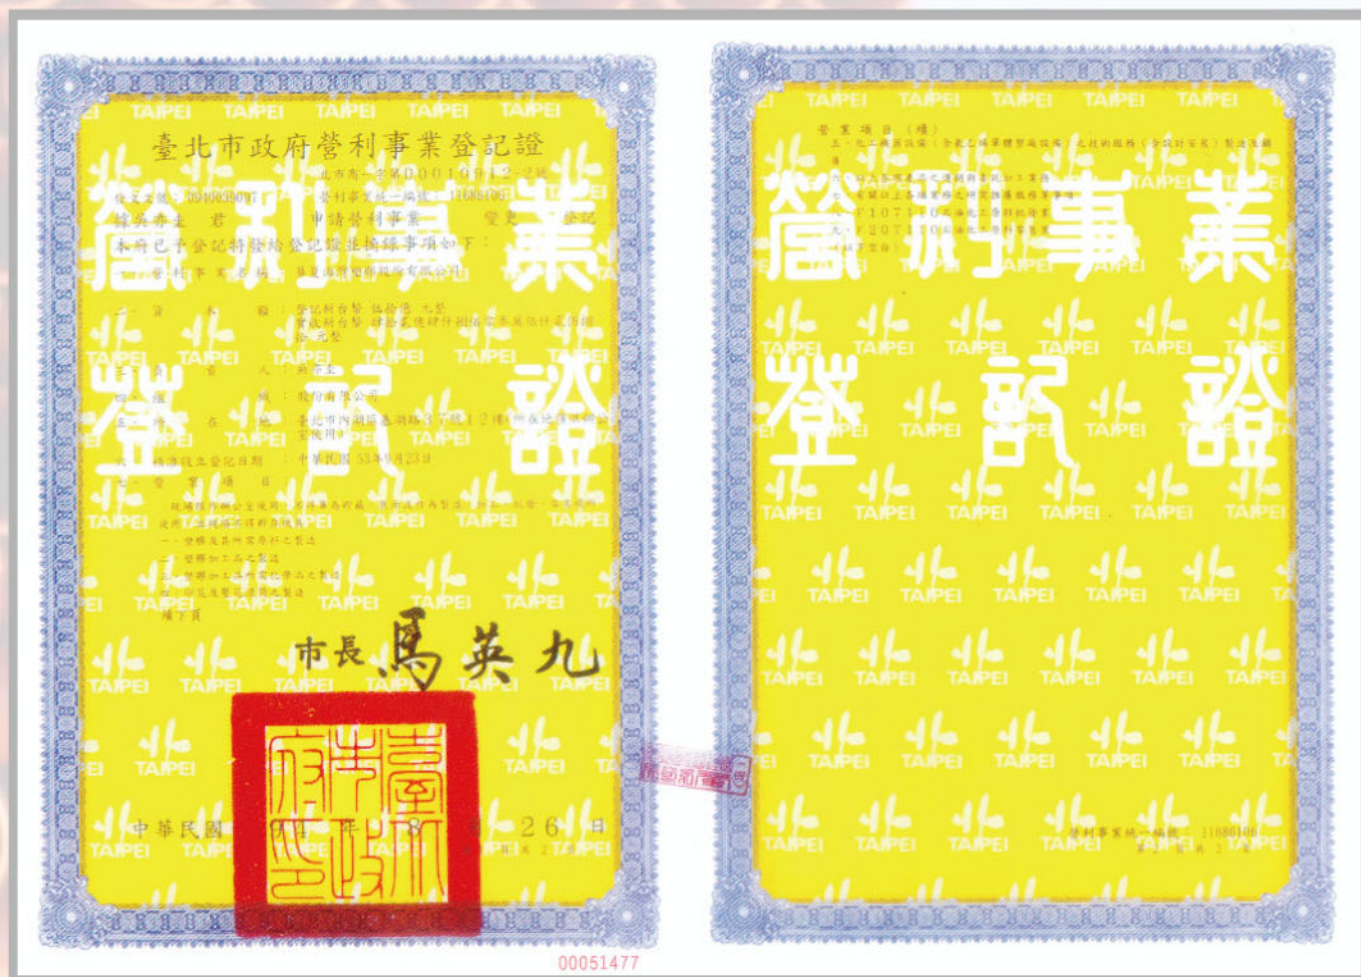

◎ 台北市政府營利事業登記證





◎ ISO9001 2015 驗證證書



◎ 經濟部標準檢驗局正字標記證書



總公司(Head Office)
台灣11492台北市內湖區基湖路37號12樓
12F., No. 37, Jihu Rd., Neihu Dist., Taipei City 11492
Taiwan, R.O.C.
電話/Tel : 886-2-2658-2158
傳真/Fax : 886-2-2659-9515

頭份廠(Toufen Plant)
台灣53159苗栗縣頭份市民族路571號
No. 571, Minzu Rd., Toufen Township., Miaoli County 35159
Taiwan, R.O.C.
電話/Tel : 886-37-623-391 EXT. 5202
傳真/Fax : 886-37-623-109